

SPS M95B Blue+ Battery®

Ideal for demanding marine PSOC applications





The proven benefits of *Blue Star Technology*® now enhanced to deliver longer battery life in Partial State Of Charge (PSOC) applications

- + Exceptional power in a compact and versatile package
- + Ideal for demanding marine applications where charging is often to less than 100% State Of Charge (SOC)
- + High cycle life and fast recharge performance
- + Thin Plate Pure Lead (TPPL) technology results in longer battery life without compromising power or performance
- Modifed electrochemistry helps prevent formation of life-shortening and power-robbing sulphate crystals

- + Higher charge voltage Faster charging
- + Operating temperature range -40°C to +65°C
- High modulus Polyphenylene Oxide (PPO) plastic materials designed to withstand extended elevated operating temperatures
 - Non-halogenated, thermally sealed plastic casing
 - Flame retardant (UL 94 VO) and LOI of at least 28%
- + Partial State of Charge (PSOC) cycling technology

Stationary Power Systems | SPS



SPS M95B Blue+ Battery®

Technical Specifications




Electrical

| 20 hour Capacity to 1.75 VPC @ 25°C (77°F) | 96 Amp/Hour |
|--|----------------------|
| Reserve Minutes | 205 |
| Bulk Charge Voltage | 14.8v @ 25°C (77°F) |
| Float Charge Voltage | 13.6v @ 25°C (77°F) |
| Cold Cranking Amps (CCA) | 760 |
| Impedance (1kHz) | 2.8 mΩ @ 25°C (77°F) |
| Conductance | 1,669 S |
| Short Circuit Current | 3,500 A |
| Maximum Charge Current | no limit |

Dimensions

| Height | 264 mm (10.4 in) | Weight | 32 kg (70 lbs) |
|--------|------------------|-----------------|--------------------|
| Width | 108 mm (4.2 in) | Terminal | Female M8 x 1.25 |
| Depth | 396 mm (15.6 in) | Terminal Torque | 8.0 Nm (71 in-lbs) |

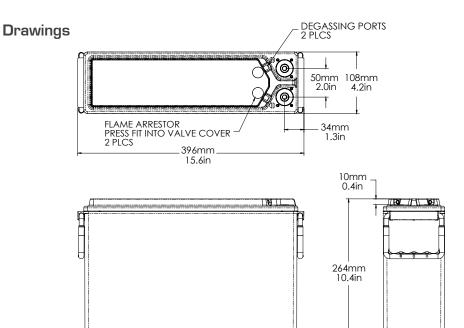

All NorthStar batteries are compliant with: Telcordia SR4228; IEC 60896; Bellcore GR-63-Core, Issue 1; British, German, and Russian telecom standards; UL approved. NorthStar is registered to ISO 9001 and ISO 14001.

Stationary Power Systems | SPS

8733 Lakewood Drive Suite 207 | Windsor, Ca. 95492 Office: (877) 924-4949 | Fax: (877) 925-4949